

## Specification Sheet

# microframe®

**Model 3520, 3530,  
3540, and 3560  
Wireless  
Visual-Pager®  
Display**




Model 3520 shown

### Features

The Model 3520, 3530, 3540, and 3560 Wireless Visual-Pager® Displays are designed to show and rotate through one 2-, 3-, 4-, or 6-digit number at a time. The display has 5.5-inch tall digits viewable up to 125 feet and is encased in an extruded aluminum case. Optional ceiling mounts are available in a single, double, or triple cluster for easy mounting in the center of or around the peripheral of a large retail area. Outdoor displays are also available with sunlight brightness for easy viewing.

### Operation

These Wireless Visual-Pager® Displays are designed to operate with the Microframe Model 3011 MultiPage Transmitter. An unlimited quantity of displays can be used with one transmitter.

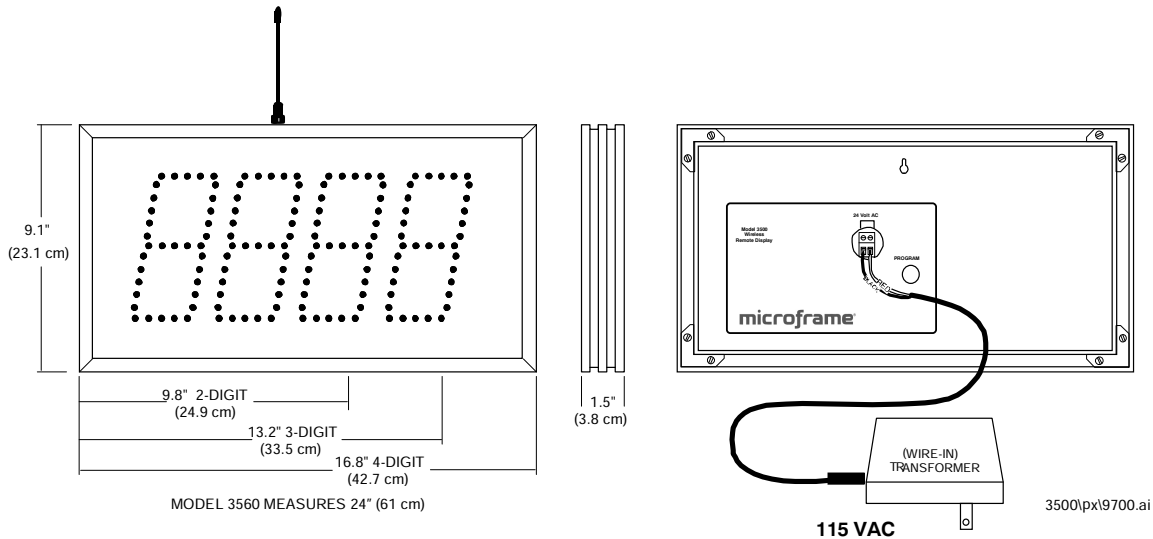

## Model 3520, 3530, 3540, and 3560 Wireless Visual-Pager® Display Specifications

Frequency	457.575 MHz
Transmit Baud Rate	512 or 1200 Auto-Learning
Distance Range	¼ to ½ Mile
Mounting	Wall or Ceiling Mount
Character Height	5.5"
Viewing Distance	125' indoors
Power Requirements	24VAC 1.2A, adapter requires 115 Volts AC @ .72A
Weight	3520 (2.5 lbs), 3530 (3 lbs), 3540 (3.5 lbs), 3560 (5.25 lbs)

**Microframe Corporation**  
604 South 12<sup>th</sup> Street  
Broken Arrow, OK 74012  
800-635-3811  
www.microframecorp.com

3500 Wireless Visual-Pager® Display Spec Sheet 04/13